

Centurion DA

Unobtrusive door-mounted AM system with low profile

Ideal for stores where floor pedestals are impractical or not permitted, the door-mounted Centurion DA system offers strong detection rate and compact profile.

Like other EAS systems in the Centurion line, the DA model automatically detects interference and the use of EAS jammers. The optional people counter can provide useful store analytics, while the remote tuning capabilities can help keep maintenance costs down.


KEY FEATURES

- ▲ Elegant, low profile acrylic design
- ▲ Sensitivity adjustment reduces false alarms
- ▲ Built-in jammer detection
- ▲ Network connection and I/O port for easy integration with other LP systems
- ▲ Remote tuning capability reduces maintenance costs and downtime
- ▲ Optional people counter can help store operations and scheduling



Centurion DA

Unobtrusive door-mounted AM system with low profile

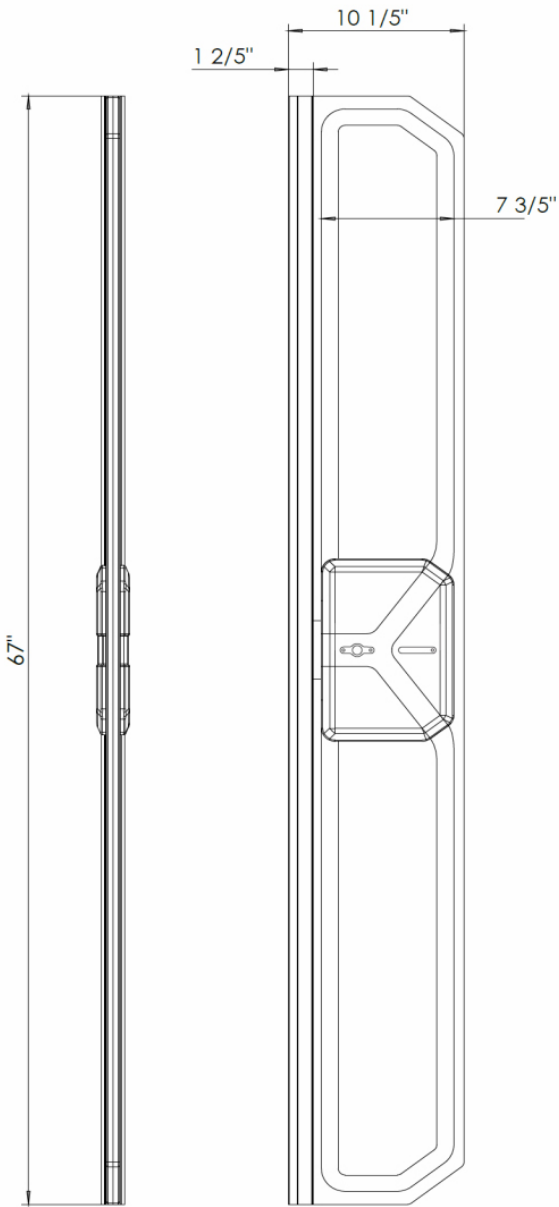

SPECIFICATIONS

Height	67"
Width	10.2"
Weight	30 lbs.
Detection range	6 feet per antenna (3 feet per side)
Power requirement	0.5 A 100-120 VAC @ 60 Hz
Fuse rating	1 A @ 250 V
Power consumption	120 W
Operating frequency	58 KHz ±200 Hz
Transmit burst	1.6 mS
Burst repetition rate	90 Hz or 45 Hz (normal) on 60Hz AC line @ 58 KHz
Receiver center frequency	58 KHz
Alarm mode	Piezo / LED on RX antenna
Operating temperature	32° F - 122° F
Relative humidity range	0 - 90%, non-condensing
Materials composition	Plastic, acrylic, steel

ORDER CODES

Transceiver: ANT-CTDR250 AM IC UNI CDUS

Receiver: ANT-CTDR250 AM IC RX CDUS

Control box: AM CONTROL BOX CDUS



PROSEGUR
SECURITY

(800) 405-1832 // PROSEGUR.US